


AIR OPERATED GREASE PUMP

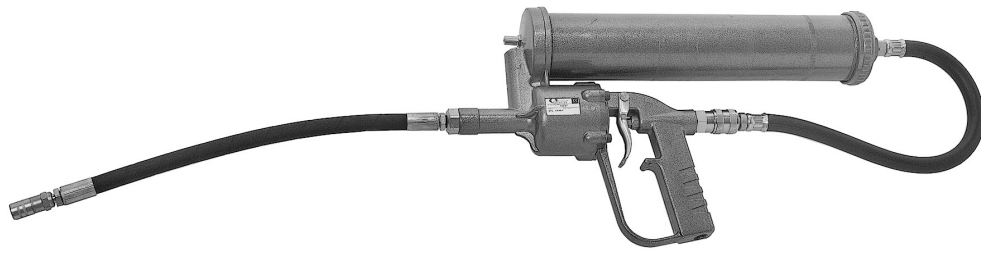

Part No
12527

TECHNICAL DATA

AIR OPERATED GREASE PUMP

Complete with air bleeder valve and connection thread for loader fitting (part No 18002), outlet with nozzle (4 jaws, Ø 14 mm). Each operation of the trigger delivers approx. 1,3 g of grease. Pressure ratio 60:1.

TECHNICAL DATA

Part No	12527
Ratio	60:1
Capacity	1 cm ³
Maximum pressure	1 (10) MPa (bar)
Volume	1000 cm ³
H.S. Code	84135069