




MOBILE PUMP HOIST 12-20KG WITH PUMP

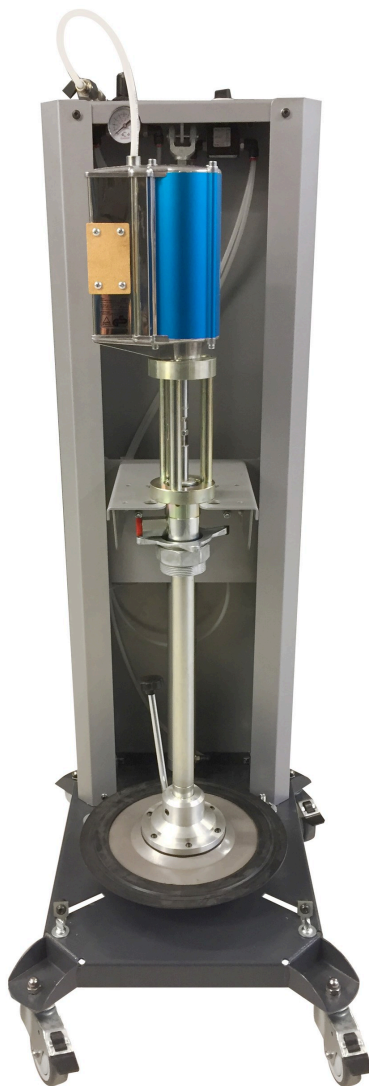

Part No
18200

TECHNICAL DATA

MOBILE PUMP HOIST 12-20KG WITH PUMP

Mobile unit designed for use with hard to pump, sticky and high viscosity greases up to NLGI3. A pneumatic piston elevates the pump for replacing an empty pail. The pneumatic piston also pushes down when the pump is in use.

It is ideal for situations where it is important to get all the grease out of the bucket. Applications include expensive grease where complete emptying is essential, dented buckets/drums that cause the follower lid to stick, and easy handling of the grease to avoid debris that can damage the pump or machine.

TECHNICAL DATA

Part No	18200
Capacity	1000 gr/min
Air connection	1/2" (F) BSP
Maximum air pressure	1,0 (10) MPa (bar)
Outlet	3/8" (F) BSP
Length	613 mm
Width	448 mm
Height	1202 mm
H.S. Code	84135069

RELATED PRODUCTS

PART NO	DESCRIPTION	
14612	Grease control valve with outlet tube	
14740	Digital grease inline meter. 1/8" (F) BSP 2500 gr/min 70 (700) MPa (bar)	
SPEC1201	Filler kit for screw-in type cartridges and lever grease guns	
18565	Follower plate adaptor Ø30 mm 127-ser	
SPEC1290	Line meter kit for grease.	
23457	Preset dosing equipment. Standard.	
14527	Grease line filter	
SPEC8110	Pump protection kit for oil and grease pumps	
15212	Hose Reel ORS Grease 6,35 (1/4") mm (inch) 10 m	
18570	Follower plate 18-20 kg 265-290 mm	
18125	Hose Grease 5Mx1/4" G1/4"(m/f)-G1/4"(f)/G3/8"(m)	