
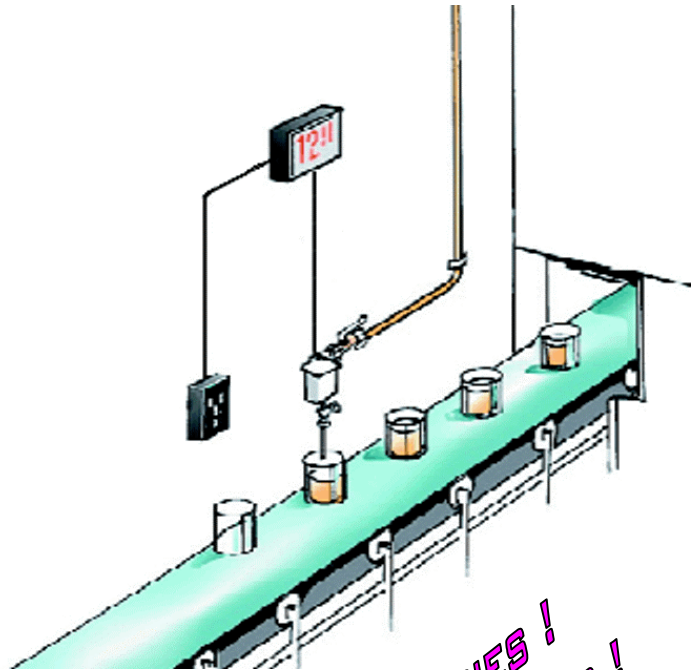


STAND-ALONE PRE-SET DISPENSER  
FRISTÅENDE FÖRVALS DOSERING  
VORWAHL DOSIERUNG  
MÈTRE DE DOSAGE PRÉ-SELECTION

PROFESSIONAL VERSION FOR INDUSTRY

(23455)

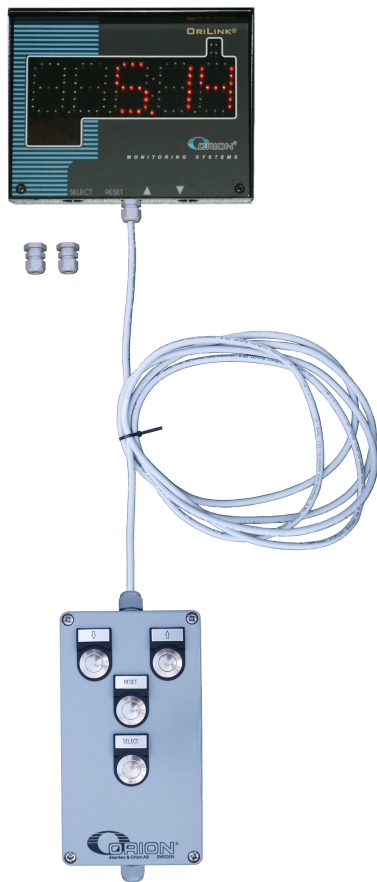

- NO MORE EMPTY BATTERIES !
- NO MORE METERS ON THE FLOOR !
- UP TO 16 SELECTABLE VOLUMES !
- HIGH ACCURACY !

 **ORION**<sup>®</sup>  
Alentec & Orion AB SWEDEN








**DESCRIPTION**

A high performance wall mounted pre-set dispense unit for industrial use that helps you to accurately fill objects with the correct amount of fluid. It reduces the amount of buttoning to get the needed volume and removes the measuring tool from the floor and other risky places. The need for battery changes is eliminated because of that the unit is mains supplied. It can be used for a wide variety of products that needs to be dispensed accurately. It can be connected to an OriLink® monitoring system if further functionality is needed at a later time.

**TECHNICAL SPECIFICATION**

Power supply	Industrial, 110-230 VAC 50/60Hz
Solenoid valve output	24VDC max. 1 A
Solenoid short-circuit protection	Yes
PPU	1-6553
Calibration	From buttons (or from OriLink® keypad or Neighbourhood)
Pre-set adjust	From buttons (or from OriLink® keypad)
Number of pre.sets	16
Number of decimals	0, 1, 2, 3, 4 or AUTO
Box	Black steel LED box with polystyrene overlay and a rugged sealed aluminium button box.
Buttons	Ni-coated brass, flat design, "vandal proof", IP65
Cable between LED and button box	5 m 7-lead halogen free cable
Optional button support (not included)	Fast dispense Pre-set 1, 2, 3 and 4.
Expansion possibilities	Fully compatible with OriLink®, can be equipped with Clock module 23405

**ACCESSORIES**

METER KIT	PICTURE	FLUID	PPU
SPEC2290		Oil professional, for high viscosity	Pulses/Litre: 328, 656 or 1312 Pulses/US gallon: 1242, 2483 or 4966
SPEC2289		Oil Standard, for normal viscosity	Pulses/Litre: 328, 656 or 1312 Pulses/US gallon 1242, 2483 or 4966
SPEC2292		Diesel and oils at higher flow	Pulses/Litre: 36 or 72 Pulses/US gallon: 136 or 272
SPEC1290		Grease	Pulses/Litre: 1450 or 2900 Pulses/kg: 1600 or 3200 Pulse/oz: 45 or 90 Pulses/lb: 726 or 1452
14527		Grease Filter Recommended for SPEC1290	About 100um ABS. Check with grease supplier before use.
SPEC7292		Coolant liquid	Pulses/Litre: 300 or 600 Pulses/US gallon: 1136 or 2272
SPEC7291		Wind screen wash	Pulses/Litre: 317 or 634 Pulses/US gallon: 1200 or 2400